




# SUNTUF<sup>®</sup> Beehive

Corrugated Polycarbonate Sheet with a Prismatic Surface

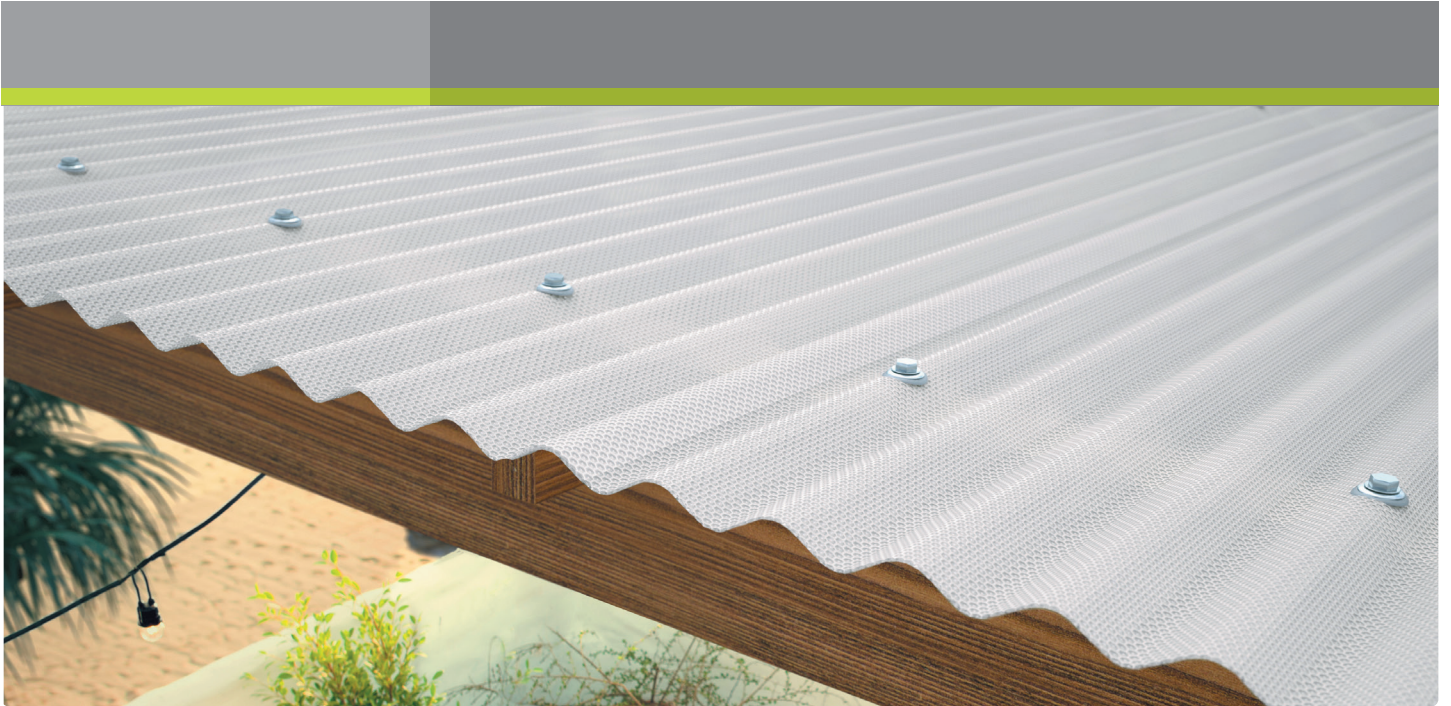

## Overview

A 2.8mm thick high-performance impact resistant polycarbonate roofing sheet engineered for professional and residential projects.

SUNTUF Beehive generates diffused light with reduced glare for enhanced comfort.

Hail proof polycarbonate that combines superior strength and durability.

An excellent choice for DIY skylights, carport roofing, and other home improvement projects.

Add modern aesthetics and style to your roofing project while extending its lifespan.


[www.palram.com.au](http://www.palram.com.au)

## Main Benefits


- Hail & impact resistant
- Superior Strength & durability
- Improved absorption of rain noise
- Modern aesthetics
- Lightweight & easy to install
- 99.9% UV Protection
- 100% diffused light
- Balance shade & daylight
- High wind load resistance
- Meets the highest fire-retardant standards

## Typical Applications


- Pergolas and gazebos
- Patio enclosures
- Sunrooms
- Carports
- Covered walkways
- Canopies and overhangs

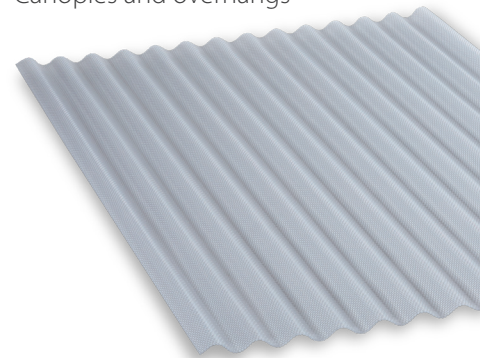





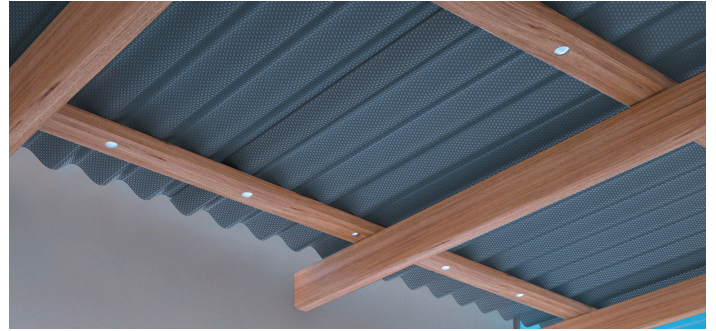


## Product Availability

Textures	Prismatic-honeycomb		
Thickness	2.8 mm		
Width	860 mm	Cover	760 mm
Profile	76/18 Corrugated		
U Value	5.5 W/M <sup>2</sup> k		
R Value	0.18M <sup>2</sup> k/W		
Roof pitch	Minimum 5 degrees		

## Colour Range

		LT (%)	SC	SHGC
Clear		90	1.00	0.87
Grey		20	0.51	0.44
Solar Ice		20	0.44	0.38

## Span Data

Corrugated Profile

Max Mid Span	1400mm
Max End Span	1100mm

## Typical Physical Properties

Property	Method*	Conditions	Units	Value
Density	D-792		g/cm <sup>3</sup>	1,2
Heat deflection temperature (H.D.T)	D-648	Load: 1.82 MPa	°C	135
Service Temperature Range (Short term)			°C	-50 to +120
Service Temperature Range (Long term)			°C	-50 to +100
Coefficient of linear thermal expansion	D-696		cm/cm°C	6.5 x 10 <sup>-5</sup>
Thermal conductivity	C-177		W/m K	0.21
Tensile strength at yield	D-638	10 mm/min	MPa	62
Tensile strength at break	D-638	1 mm/min	MPa	65
Elongation at yield	D-638	10 mm/min	%	6
Elongation at break	D-638	10 mm/min	%	>70
Tensile modulus of elasticity	D-638	1 mm/min	MPa	2,300
Flexural strength mechanical	D-790	1 mm/min	MPa	93
Flexural modulus	D-790	1.3 mm/min	MPa	1,890
Impact falling weight	(ISO 6603/1 E50)	2.8 mm sheet	J	75
Rockwell hardness	D-785		R Scale	118
Light transmission	D-1003	Clear sheet	%	90%
Haze	D-1003	Clear sheet	%	<0.5
Yellowness index	D-1003	Clear sheet	YI	<1

\* ASTM method except where noted otherwise

## Flammability

SUNTUF® Beehive complies with the most demanding international fire resistance standards in the field of plastics, as indicated in the detailed table herein. The classification is subject to product type, thickness and color.

Australian Standard: AS/NZS 1530.3:1999

European Standard: EN 13501 - B s1, d0

Warranties only apply to installations and maintenance that follow Palram installation instructions and specifications.



**PALRAM SA/NT**  
517A Cross Keys Road  
Cavan SA 5094  
Tel: (08) 8262 2288  
Fax: (08) 8262 3388  
salessa@palram.com

**PALRAM NSW/ACT**  
Unit 2, 26 Redfern St.  
Wetherill Park, NSW 2164  
Tel: (02)8788 6100  
Fax: (02) 8788 6199  
salesnsw@palram.com

**PALRAM QLD**  
Unit 9C / 380 Bilsen Road  
Geebung QLD 4034  
Tel: (07) 3172 5581  
Fax: (07) 3172 5516  
salesqld@palram.com

**PALRAM VIC/TAS**  
34 Buys Court  
Derrimut VIC 3030  
Tel: (03) 9219 4444  
Fax: (03) 9219 4455  
salesvic@palram.com

**PALRAM WA**  
74 Christable Way  
Landsdale WA 6065  
Tel: (08) 9302 4173  
Fax: (08) 9302 5287  
saleswa@palram.com



603762 - 02.2024

In as much as Palram Industries has no control over the use to which others may put the material, it does not guarantee that the same results as those described herein will be obtained. Each user of the material should make his own tests to determine the material's suitability for his own particular use. Statements concerning possible or suggested uses of the materials described herein are not to be construed as constituting a license under any Palram Industries patent covering such use or as recommendations for use of such materials in the infringement of any patent. Palram Industries or its distributors cannot be held responsible for any losses incurred through incorrect installation of the material. In accordance with our company policy of continual product development you are advised to check with your local Palram Industries supplier to ensure that you have obtained the most up to date information.

