

EZ Glaze™ smart layout simplifies installation and fastening, while providing high load capacity and durability.


The 3mm thick polycarbonate sheets fit directly over rafters without supporting purlins.

EZ Glaze is an attractive and user-friendly solution for clear patio roofs and DIY skylights.

Enjoy natural daylight and comfort with outstanding design and finish.

Typical Applications

- Pergolas and gazebos
- Patio enclosures
- Sunrooms
- Carports

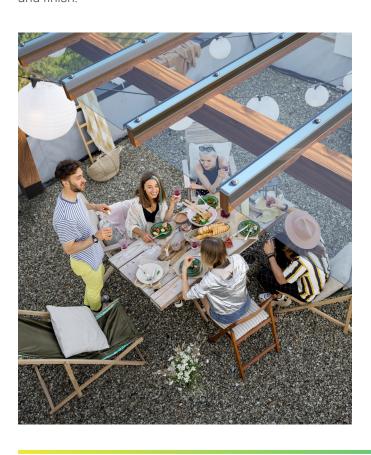



Easy to Install



Glass-Like Appearance



Rafter Installation



Premium Solution



Superior Strength



UV Protection



Colours

Colour		LT [%]	SC*	SHGC**
	Clear	90	1.0	0.86
	Grey	20	0.51	0.44
V Solar Smart [™] Selective Solar Control Technology				
	Breeze	70	0.61	0.53

- *Shading Coefficient
- **Solar Heat Gain (SHGC)

Additional colours are available under minimum quantities.







Scan For Installation Guide

Warranties only apply to installations and maintenance that follow Palram installation instructions and specifications.

Profiles

Maximum Length		7,000 mm		
Thickness		3 mm		
Cover Width		600 mm		
Total Width		673 mm		
Profile –	EZ Glaze 50 LP	40-50mm 25mm 22mm		
	EZ Glaze 50	40-50mm 39mm 36mm		
Loads Resistance		Wind Uplift: 2.0 Kpa Wind Load: 4.0 Kpa		

Accessories

Accessory



Polycarbonate Head Wall




Polycarbonate Ridge Cap

Installation Guidelines

Minimum Roof Pitch



Minimum roof pitch ensure that your roof pitch is at least 3 degrees. This will ensure adequate water run off.



Flammability

EZ Glaze™ complies with the most demanding international fire resistance standards in the field of plastic.

 \bullet AS9705- Group 1 AS1530.3- Ignitability- 0, Spread of Flame0, Heat Index-0, Smoke- 2.



www.palram.com/au

